

QUESTION & ANSWER

HIGHER QUALITY, BETTER SERVICE

Provide One Year Free Update!

https://www.passquestion.com

Exam : NSE6_FML-6.2

Title : Fortinet NSE 6 - FortiMail

6.2

Version: DEMO

1.Refer to the exhibit.

Mail Server Settings	Relay Host List	Disclai	mer	Disclaimer Exclusion List	Storage
Local Host:					
Host name:		mx			
Local domain name:		example.com			
SMTP server port number:		25	men		
SMTP over SSL/TLS		0			
SMTPS server port number:		465	nature		
SMTP MSA service		3			
SMTP MSA port number:		587	magn		
POP3 server port number:		110	HARM		
Default domain for authentication:		None			
Redirect HTTP to HTTPS		•			

Which two statements about the mail server settings are true? (Choose two.)

- A. FortiMail will support the STARTTLS extension
- B. FortiMail will accept SMTPS connections
- C. FortiMail will drop any inbound plaintext SMTP connection
- D. FortiMail will enforce SMTPS on all outbound sessions

Answer: B,C

2.A FortiMail is configured with the protected domain example.com.

On this FortiMail, which two envelope addresses are considered incoming? (Choose two.)

- A. MAIL FROM: accounts@example.com RCPT TO: sales@external.org
- B. MAIL FROM: support@example.com RCPT TO: marketing@example.com
- C. MAIL FROM: training@external.org RCPT TO: students@external.org
- D. MAIL FROM: mis@hosted.net RCPT TO: noc@example.com

Answer: C,D Explanation:


Reference: https://fortinetweb.s3.amazonaws.com/docs.fortinet.com/v2/attachments/9aa62d26-858d-11ea-9384-00505692583a/FortiMail-6.4.0-Administration Guide.pdf (30)


- 3. Which FortiMail option removes embedded code components in Microsoft Word, while maintaining the original file format?
- A. Behavior analysis
- B. Impersonation analysis
- C. Content disarm and reconstruction
- D. Header analysis


Answer: C Explanation:

Reference: https://fortinetweb.s3.amazonaws.com/docs.fortinet.com/v2/attachments/8c063dd3-bafe-11e9- a989-00505692583a/fortimail-admin-620.pdf (435)

4.Refer to the exhibit.



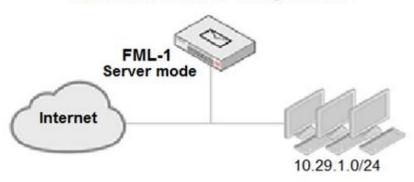

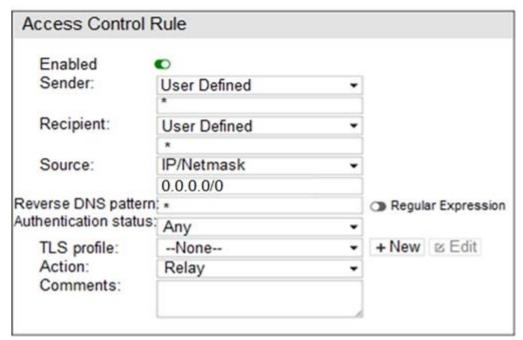

An administrator must enforce authentication on FML-1 for all outbound email from the example.com domain.

Which two settings should be used to configure the access receive rule? (Choose two.)

- A. The Recipient pattern should be set to *@example.com
- B. The Authentication status should be set to Authenticated
- C. The Sender IP/netmask should be set to 10.29.1.0/24
- D. The Action should be set to Reject

Answer: B,C

5.Refer to the exhibit.

C:\>nslookup -type=mx example.com

Server: PriNS

Address: 10.200.3.254

Non-authoritative answer:

example.com MX preference = 10, mail exchanger = mx.hosted.com example.com MX preference = 20, mail exchanger = mx.example.com

Which two statements about the MTAs of the domain example.com are true? (Choose two.)

- A. The external MTAs will send email to mx.example.com only if mx.hosted.com is unreachable
- B. The PriNS server should receive all email for the example.com domain
- C. The primary MTA for the example.com domain is mx.hosted.com
- D. The higher preference value is used to load balance more email to the mx.example.com MTA **Answer:** A,C